(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 25 August 2005 (25.08.2005)

PCT

(10) International Publication Number WO 2005/078142 A1

(51) International Patent Classification⁷:

C21C 7/00

(21) International Application Number:

PCT/IN2005/000042

(22) International Filing Date: 10 February 2005 (10.02.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

57/KOL/04

11 February 2004 (11.02.2004) IN


- (71) Applicant (for all designated States except US): THE TATA IRON AND STEEL COMPANY LIMITED [IN/IN]; An Indian Company, Research and Development and Division, Jamshedpur 831 001 (IN).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SARBENDU, Sanyal [IN/IN]; The Tate Iron Steel Company Limited, Research and Development Division, Jamshedpur 831 001 (IN). SANJAY, Chandra [IN/IN]; The Tata Iron Steel

Company Limited, Research and Development Division, Jamshedpur 831 001 (IN).

- (74) Agents: DAVAR, G., S. et al.; L S Davar & Co., "Monalisa", Flats 1B & 1C, 17 Camac Street, Calcutta 700 017 (IN).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A CORED WIRE INJECTION PROCESS IH STEEL MELTS

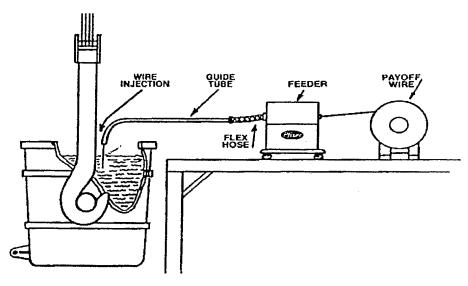

(57) Abstract: The present invention provides a cored wire injection process for introducing fluxes and alloying additives in liquid steel bath. The bath temperature and chemistry of the liquid steel is adjusted according to requirements in a secondary treatment unit. The additives are released from the cored wire, while controlling the zone of release. The yield of the additives can thus be controlled by changing dimension of the cored wire and speed of injection to suit the grade of steel processed and the treatment temperature. The zone of release is preferably close to the bottom of the ladle and the diameter and sheath thickness of the cored wire are preferably more than 13 mm and 0.4 mm respectively.



Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.